

MEASURE CONVERTERS WITH DISPLAY, UNIVERSAL, PROGRAMMABLE

Series μC: μc 305U, μc 405U, μc 805U



Features

- Universal power supply:** 20 to 270 Vac and 20 to 300 Vdc
- Universal input:** ±100mV, ±1V, ±10V, ±300V, ±20mA, Pt100 3 wire, Ni 100, thermocouple, resistance and potentiometer.
- Average response time: 150ms
- Supply for 2-wire sensor
- Insulated analog output (A)** 0-4-20mA (active/passive) current or 0-10V voltage.
- 4 relay outputs (R4):** (8A/250 VAC on resistive load).

Detection of the sensor rupture.

Insulation between input / outputs / supply.

Self-zero and self-diagnosis

Mode driver: the analog output is piloted by the micro-console.

Function simulation of the input measure

Programming either with the micro-console or by PC via the software MCvision.

Type:

μC 305U: 1 analog output

μC 405U: 4 relays

μC 805U: 1 analog output

+ 4 relays

Configuration

Easy programming on front face with the micro-console keyboard or with the PC software MCVISION.

Programming with the Micro-console

The series μC accepts 2 types of μconsoles:

- The old generation with 4 alphanumerical electroluminescent green digits
 - The new generation with graphical rear-lit LCD
- The LCD allows visualising 4 pieces of information:
- the value of the measure,
 - the unit of the displayed measure,
 - the value of the analog output or the marking name of the product,
 - the status of the relay outputs.

This μconsole with LCD also allows displaying these information either vertically or horizontally, according to the sense in which the converter is mounted.


Programming by PC: MCVision

Programming software (Windows environment)

allows:


- the storage of configurations as files which can be consulted, modified, duplicated or loaded into the converters,
- the edition and printing of files with or without having a converter connected.

Dimensions

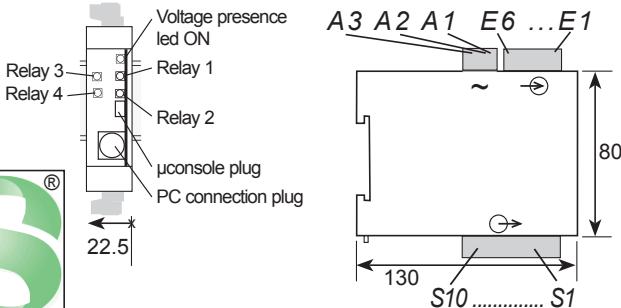

The friendly interface

- Protection: case / terminals: IP 20
- Plug-off connectors for screwed connectings (2.5 mm², flexible or rigid)
- Weight: 240g (with packaging)
- Self-extinguishing case of black UL 94VO ABS.
- Mounting in switchbox: latching on symmetrical DIN rail.
- Rack version: consult.

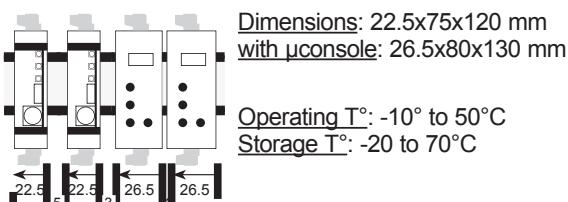

Dimensions: 22.5x75x120 mm
with μconsole: 26.5x80x130 mm

Operating T°: -10° to 50°C
Storage T°: -20 to 70°C

- CE accord. to IEC 61000-6-4, IEC 61000-6-2 (industrial environment).
- Disturbance immunity according to the standard IEC 61000-6-2 (IEC 61000-4-3 level 3, IEC 61000-4-4 level 4, IEC 61000-4-6 level 3)

Coding

Type	μC 305U
Universal inputs	
Outputs:	
μC 305U:	1 analog
μC 405U:	4 relays
μC 805U:	1 analog, 4 relays

For the μC 805U, the type of the analog output (mA or V) must be specified on order.

Power supply: 20 to 270 Vac and 20 to 300 Vdc

Power draw: 3 W max. 5.5 VA max.
Dielectric withstanding: 2 kV-50Hz-1min.

Order example: For a converter with universal input + 1 analog output + 4 relays, powered in 230 V, request reference μC 805U

Features

Inputs

Types of INPUTS	Measure range adjustable from:		Permanent overload	Intrinsic error	Console resolution	Input impedance
mA	-22 to +22mA	♦	±100mA		10 µA	0.9V max. drop
mV*	-110 to +110mV	♦	±1V		10 µV	
	-1.1 to +1.1V	♦		< ±0.05% of the MR	1 mV	
V	-11 to +11V	♦	±50V		1 mV	
	-330 to +330V	♦	±600V		10mV	≥ 1MΩ
Thermocouples ♦ Standard IEC 581	°C	°F				
J	-160/1200	-256/2192				
K	-270/1370	-454/2498				
B	200/1820	392/3308				
R	-50/1770	-58/3218				
S	-50/1770	-58/3218				
T	-270/410	-454/70				
E	-120/1000	-184/1832				
N	0/1300	-32/2372				
L	-150/910	-238/1670				
W	1000/2300	1832/4172				
W3	0/2480	32/4496				
WRE5	0/2300	32/4172				
Sensor Pt100Ω (1)* 3 wire, Standard IEC 751 (DIN 43760)	°C	°F				
	-200/850	-328/1562				
Sensor Ni 100 3 wire (1)♦	-60/260	-76/500	-			
Resistive sensors	Calibers 0-440 Ω and 0-2.2 kΩ ♦ (0-8.8 kΩ optional)		-			
Potentiometer	from 100Ω to 10 kΩ ♦		-			
Supply for 2- wire sensor	24 VDC ±15% with protection from short-circuits. 25 mA max.					
Special linear- sation programming up to 20 points	On input: mV, V, mA. Resistive sensors and potentiometer					

- (1) Line resistance <250
(2) Or 30 µV typical (60 µV Max.)
♦ CJC efficiency: ±0.03°C/C ±0.5°C
from -5°C to +55°C
MR Measure range

▲ A 12 µA pulsed current allows the detection of line or sensor rupture.
♦ Cut off: the display of the console and the output of the µC remain at down scale for an input signal < than the cut off value, programmable from 0% to 100% of the input scale.

Thermic drift <10ppm /°C

Outputs

µC 350U	µC 805U	µC 405U	Types of OUTPUTS	Features
●	●		Analog insulated	Active/passive current Voltage
				Direct or reversed 0-20mA Load impedance ≤ Lr 600Ω
				Direct or reversed 0-10V Load impedance ≥ Lr 5kΩ (µC 350U) ≥ Lr 500kΩ (µC 805U)
●	●	●	4 relays with NO contact	2 setpoints per relay, configurable on the whole MR. Hysteresis programmable from 0 to 100%. Time delay programmable from 0 to 25 sec. (8A/ 250VAC on resistive load)

Response time of the outputs:

(for a variation from 0 to 90% of the input signal)

Average response time: 150 ms (1)


(1) Add 40 ms for the response time on the analog output

Galvanic partition:

2kV-50Hz-1min. between supply, input, analog output, relay output.

Wiring


Upper connectors

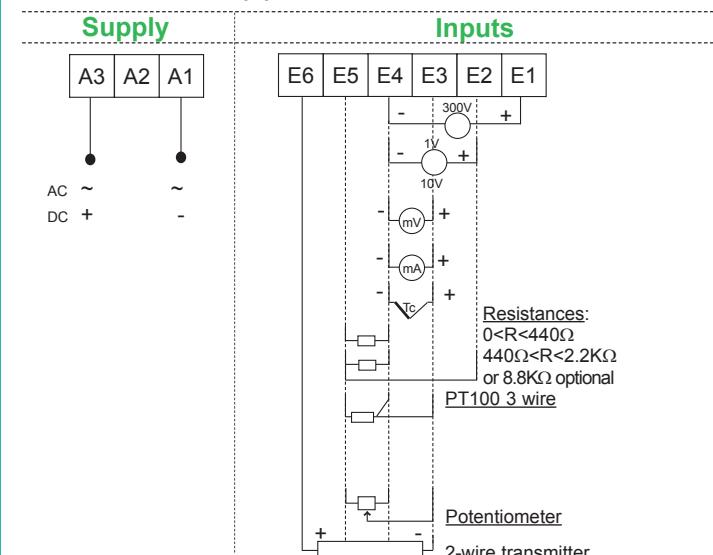

Lower connector


OUTPUTS

µC 805U

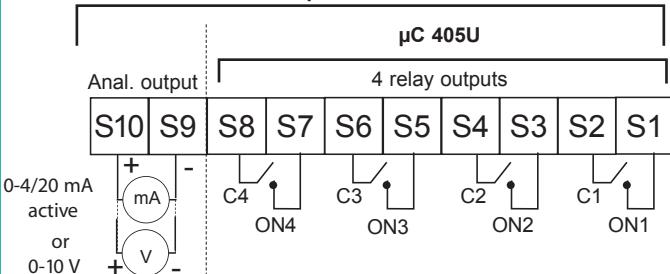

For a µC 805U, the type of the analog output (mA ou V) must be specified on order.

µC 405U

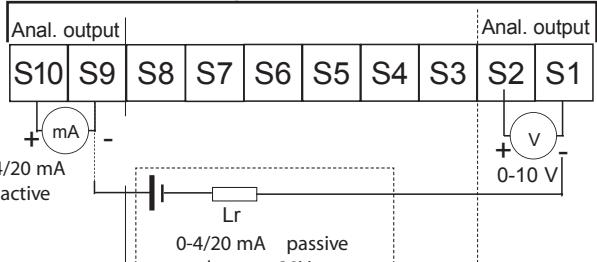

⚠ Only 1 of the 2 analog outputs can be activated at the same time (outputs not independent).

µC 305U

Anal. output Anal. output

S10 S9 S8 S7 S6 S5 S4 S3 S2 S1

0-4/20 mA active

Lr 0-4/20 mA passive

external source 30V max.

same time